Ensuite - Accessible

CARDIAC PROTECTION | **BODY PROTECTION** | HEARING LOOP | RADIATION SHIELDING | MAGNETIC / RF SHIELDING | HEPA FILTRATION | POSITIVE PRESSURE | NEGATIVE PRESSURE

CODE	DESCRIPTION
ELGP-201.01	GPO: double, wall mounted, horizontal
ELSW-001	SWITCH: light
FIBM-102	MIRROR: fixed, safety glass, frameless
FIDI-231	DISPENSER: paper towel, wall mounted
FIDI-256	DISPENSER: soap, wall mounted
FIDI-281	HOLDER: soap/shampoo, wall mounted
FIDI-301	DISPENSER: toilet paper, wall mounted
FIGE-037	BENCH SEAT: fold up/down, with folding legs, wet area, wall mounted
FIHR-026	HOOK: coat, wall mounted
FIRT-061.02	TRACK: curtain, shower, L-shaped
FIRT-101	GRAB RAIL: straight, horizontal
FIRT-127	GRAB RAIL: toilet, 90 degree, wrap around corner, with backrest
FIRT-151	GRAB RAIL: shower, straight, horizontal
FLSK-021	SKIRTING: vinyl, integral with floor vinyl, coved
FLVY-114	FLOOR FINISH: vinyl, seamless, non-slip, wet area, barefoot
FQGE-102	CURTAIN: shower
FQWS-051	BIN: general waste, 20L
FQWS-331	BIN: sanitary waste
HYBA-148	BASIN: type C, handwashing, with integral double shelf
HYDR-021	DRAIN: floor waste, round
HYSH-057	SHOWER: hand-held, connection on wall, bracket on vertical wall mounted rail, accessible
HYTP-052	TAPWARE: basin, mixer, fixture mounted, accessible
HYTP-252	TAPWARE: shower, mixer, accessible
HYWC-033	TOILET SUITE: patient, accessible
ITCL-122	BUTTON: nurse call, patient to staff call, with cancel, wall mounted, wet area
ITCL-182	BUTTON: nurse call, staff assist, with cancel, wall mounted, wet area
ITCL-192	BUTTON: nurse call, emergency, with cancel, wall mounted, wet area
MGAS-043	OUTLET: oxygen (O2), wall mounted
MGFP-041	FLOWMETER: oxygen
WLFI-011.07	WALL FINISH: vinyl, full height

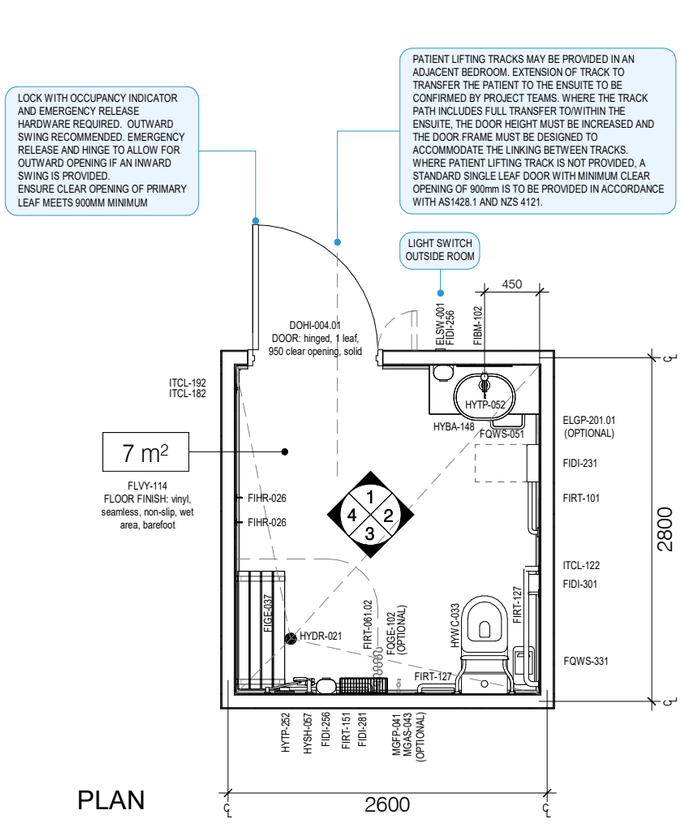

PLAN

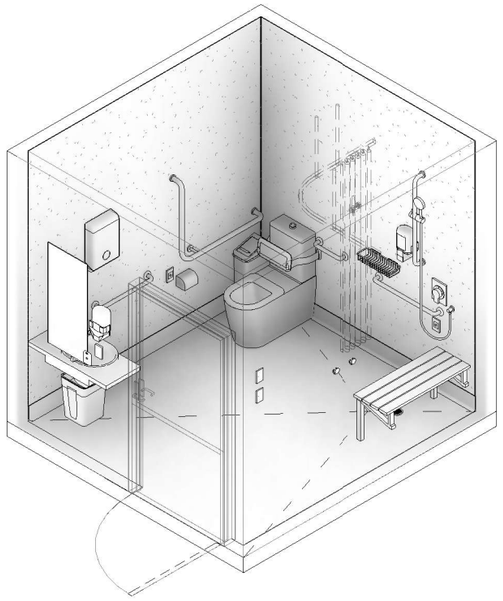

3D VIEW

PATIENT LIFTING TRACKS MAY BE PROVIDED IN AN ADJACENT BEDROOM. EXTENSION OF TRACK TO TRANSFER THE PATIENT TO THE ENSUITE TO BE CONFIRMED BY PROJECT TEAMS. WHERE THE TRACK PATH INCLUDES FULL TRANSFER TO/WITHIN THE ENSUITE, THE DOOR HEIGHT MUST BE INCREASED AND THE DOOR FRAME MUST BE DESIGNED TO ACCOMMODATE THE LINKING BETWEEN TRACKS. WHERE PATIENT LIFTING TRACK IS NOT PROVIDED, A STANDARD SINGLE LEAF DOOR WITH MINIMUM CLEAR OPENING OF 900mm IS TO BE PROVIDED IN ACCORDANCE WITH AS1428.1 AND NZS 4121.

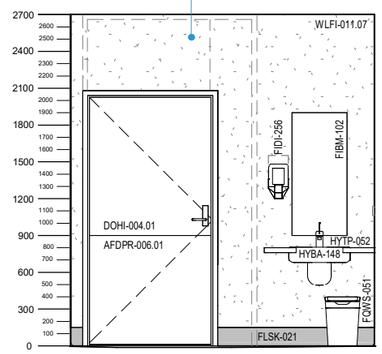

ELEVATION 1

TYPE, SIZE AND PLACEMENT OF TOILET PAPER DISPENSER IS TO BE CONFIRMED AT PROJECT LEVEL AND MUST BE COORDINATED WITH SELECTED TOILET, GRAB RAILS, ASSISTIVE EQUIPMENT AND NURSE CALL BUTTONS IN ACCORDANCE WITH AS1428 / NZS 4121 REQUIREMENTS. LARGE DISPENSERS FOR MULTIPLE ROLLS, JUMBO ROLL(S) OR INTERLEAVED TOILET PAPER MAY BE LOCATED IN THE ZONE ABOVE THE GRAB RAIL (WITH APPROPRIATE APPROVALS / CONFIRMATION BY ACCESSIBILITY CONSULTANT AT PROJECT LEVEL), WITH THE OPERABLE AREA IDEALLY LOCATED AT THE FRONT/BOTTOM OF THIS ZONE. PLACEMENT AND DEPTH OF DISPENSER MUST NOT COMPROMISE ERGONOMIC USE OF THE GRAB RAIL OR CREATE FINGER ENTRAPMENT RISK WITH ASSISTIVE EQUIPMENT.

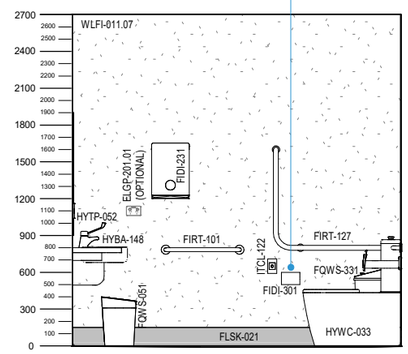

ELEVATION 2

RETICULATED MEDICAL GAS OUTLETS MAY BE CONSIDERED IN ENSUITES ON SELECTED SPECIALISED UNITS TO SUIT PATIENT COHORT REQUIREMENTS IN LINE WITH LOCAL JURISDICTIONAL POLICIES.
REFER TO HPU 340 ADULT ACUTE INPATIENT UNIT FOR MORE INFORMATION.
WHERE PROVIDED, LOCATION OF OUTLETS IS TO BE CONFIRMED AT PROJECT LEVEL TO SUIT CLINICAL SERVICE REQUIREMENTS.
CONSIDERATION MUST BE GIVEN TO MITIGATING CONTAMINATION RISK OF MEDICAL GAS OUTLETS FROM TOILET PLUME.

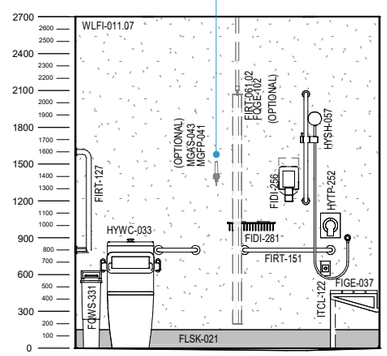

ELEVATION 3

PROVISION OF A SHOWER CHAIR OR COMMODE IN LIEU OF THE WALL MOUNTED FOLD DOWN BENCH MAY BE CONSIDERED AND APPROVED AT PROJECT LEVEL IN ALIGNMENT WITH AS1428.1 / NZS 4121

CLFS-013
CEILING: flush set, suspended, moisture resistant

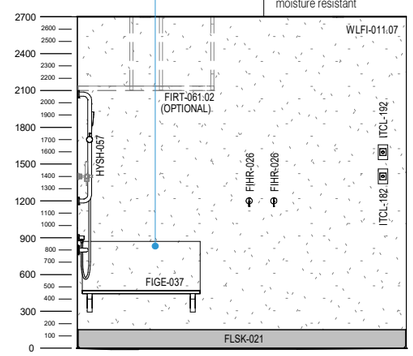

ELEVATION 4

AustHFG Australasian Health Facility Guidelines
Copyright © 2026 Australasian Health Infrastructure Alliance (AHIA)

Scale

Plan + Elevations 1:50 @ A3 (0 0.5 1 1.5 2 2.5)

Details 1:25 @ A3 (0 0.25 0.5 0.75 1 1.25)

FOR GUIDANCE

Revision	Description	Date
6	Redocumented in new RLS format with panorama	18.11.2026
5	Updated following AHIA review	15.12.2025
4	Item coding and naming updated	20.03.2017
3	Historic Revision Placeholder	Date 3

Room Code ENS-ACC

Revision 6

Vizylab