





CODE	DESCRIPTION
AFDPR-006.01	DOOR PROTECTION: plate, to 900H
ELGP-105	GPO: single, wall mounted, cleaner
ELGP-201.01	GPO: double, wall mounted, horizontal
ELGP-226	GPO: double, in floor box
ELSW-001	SWITCH: light
FIHR-212	BRACKET: computer display screen, single, articulated, wall mounted
FLCP-006	FLOOR FINISH: carpet tiles
FLSK-026	SKIRTING: vinyl, leather edge
FQBS-142	CHAIR: meeting room, stackable
FQTA-125.04	TABLE: rectangular, 750H, 1500L x 750W, folding, on casters
ITAV-102	CONTROL PANEL: AV system, wall mounted
ITAV-111	COMPUTER: AV system, central processing unit (CPU)
ITAV-121	DISPLAY SCREEN: AV system
ITAV-134	CAMERA: AV system, video conferencing, surface mounted
ITAV-147	MICROPHONE: AV system, portable
ITBU-031	CONTROL PANEL: room booking system
ITIN-016	OUTLET: data, single RJ45, wall mounted
ITIN-022	OUTLET: data, double RJ45, in floor box
ITIN-026	OUTLET: data, double RJ45, wall mounted
ITIN-036	OUTLET: data, triple RJ45, wall mounted
ITIN-162	FLOOR BOX: power and data outlets, flush floor mounted
ITIN-172	DESK BOX: power and data outlets, softwired, flush mounted
ITNE-076	TELEPHONE: handset, wall mounted
ITSE-061	BUTTON: security, duress, fixed, wall mounted
ITSE-261	READER: security, access control, proximity card, wall mounted
JOBE-021	BENCH: 550D, laminate
JOCU-101	CUPBOARD: wall mounted, single door
JOCU-125	CUPBOARD: wall mounted, double door, for audio-visual equipment
JOCU-201	CUPBOARD: under bench, single door
JOCU-225	CUPBOARD: under bench, double door, for audio-visual equipment
JQGE-001	BULKHEAD: joinery
WIFX-056.04	WINDOW: fixed, internal, double glazed, sill at 750H, with integral blind
WLF1-002	WALL FINISH: paint, clinical areas


REQUIREMENTS FOR THE SELECTION OF SUITABLE FINISHES, HARDWARE, FIXTURES AND FITTINGS OF THE TYPE MANUFACTURED AND MARKETED AS TAMPER PROOF AND ANTI-LIGATURE, INCLUDING ANY WEIGHT LIMITS FOR COLLAPSING/BREAKING STRAIN FOR FIXTURES, MUST BE CONFIRMED AT PROJECT LEVEL BASED ON LOCAL PATIENT SAFETY POLICIES, LOCAL DESIGN GUIDANCE, RISK ASSESSMENTS AND CONFIRMATION OF OPERATIONAL MODELS. ALL TAMPER PROOF AND ANTI-LIGATURE ITEMS MUST BE INSTALLED IN ACCORDANCE WITH THEIR MANUFACTURERS INSTRUCTIONS.

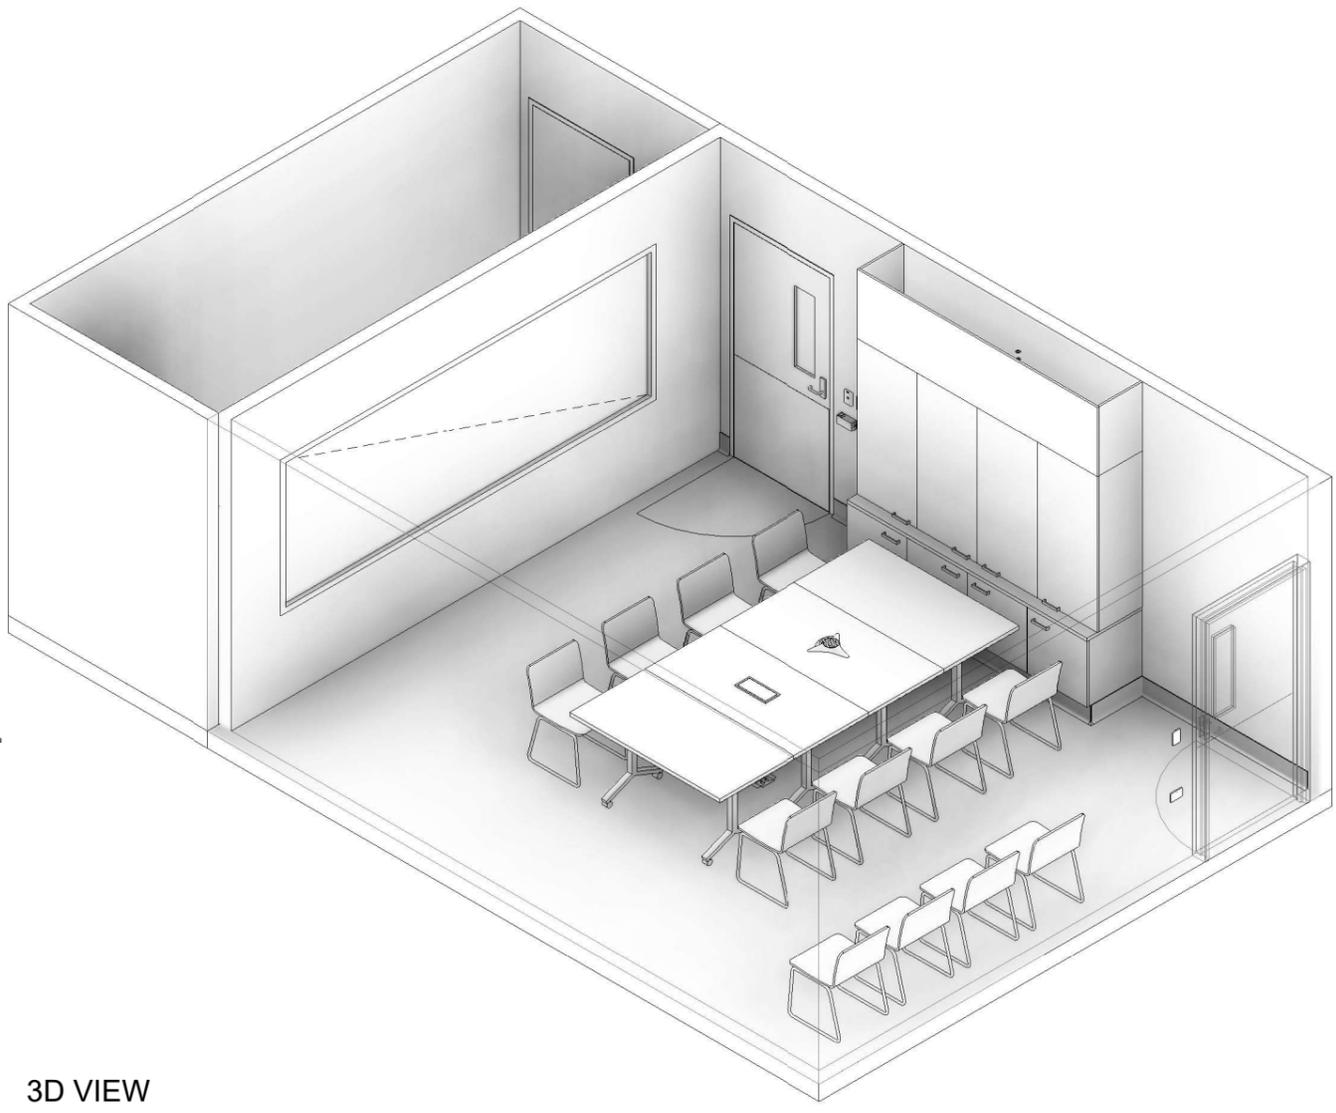

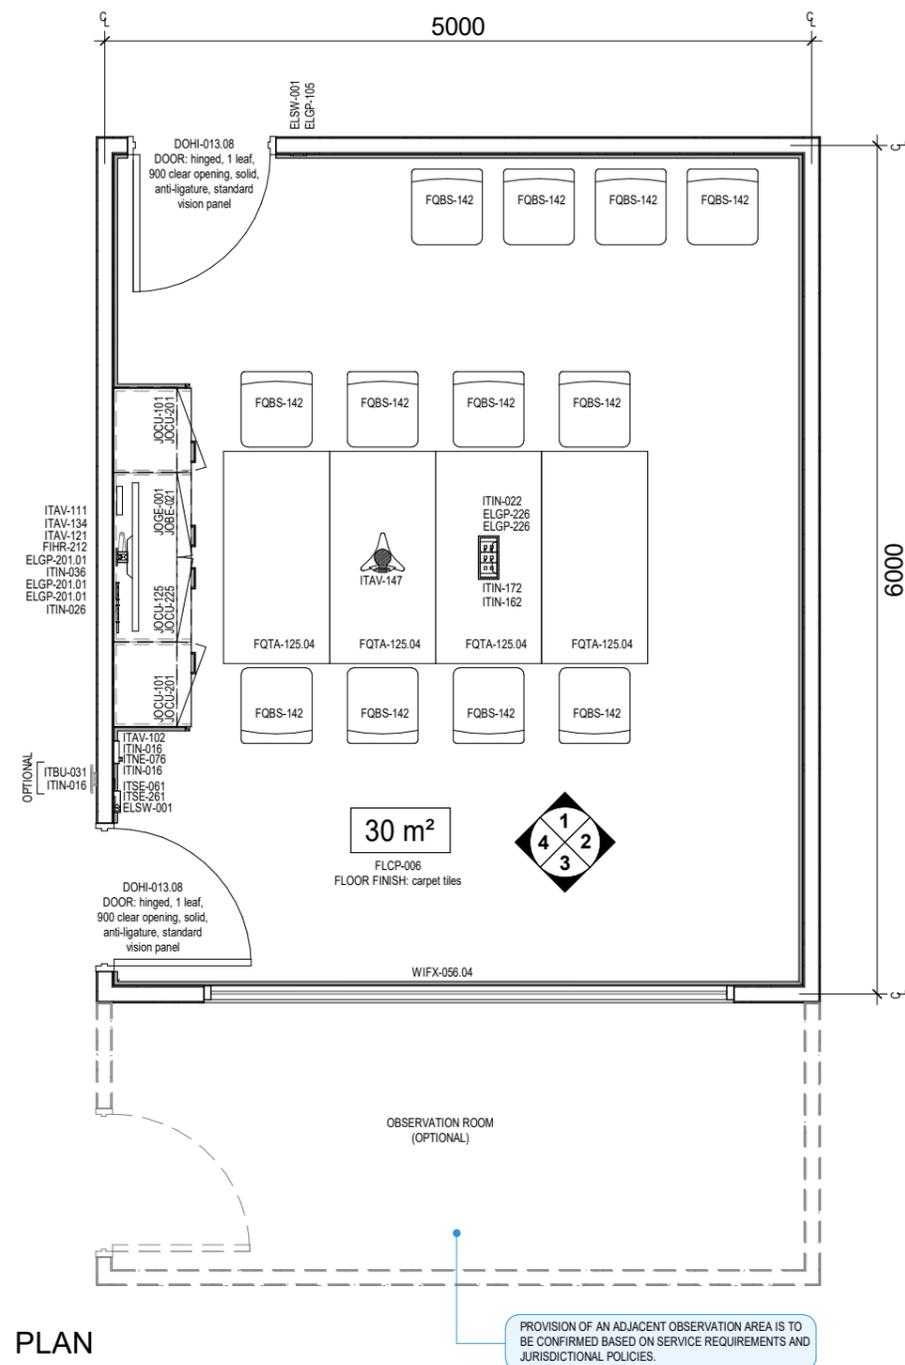


CODE	DESCRIPTION
AFDPR-006.01	DOOR PROTECTION: plate, to 900H
ELGP-105	GPO: single, wall mounted, cleaner
ELGP-201.01	GPO: double, wall mounted, horizontal
ELGP-226	GPO: double, in floor box
ELSW-001	SWITCH: light
FIHR-212	BRACKET: computer display screen, single, articulated, wall mounted
FLCP-006	FLOOR FINISH: carpet tiles
FLSK-026	SKIRTING: vinyl, leather edge
FOBS-142	CHAIR: meeting room, stackable
FQTA-125.04	TABLE: rectangular, 750H, 1500L x 750W, folding, on casters
ITAV-102	CONTROL PANEL: AV system, wall mounted
ITAV-111	COMPUTER: AV system, central processing unit (CPU)
ITAV-121	DISPLAY SCREEN: AV system
ITAV-134	CAMERA: AV system, video conferencing, surface mounted
ITAV-147	MICROPHONE: AV system, portable
ITBU-031	CONTROL PANEL: room booking system
ITIN-016	OUTLET: data, single RJ45, wall mounted
ITIN-022	OUTLET: data, double RJ45, in floor box
ITIN-026	OUTLET: data, double RJ45, wall mounted
ITIN-036	OUTLET: data, triple RJ45, wall mounted
ITIN-162	FLOOR BOX: power and data outlets, flush floor mounted
ITIN-172	DESK BOX: power and data outlets, softwired, flush mounted
ITNE-076	TELEPHONE: handset, wall mounted
ITSE-061	BUTTON: security, duress, fixed, wall mounted
ITSE-261	READER: security, access control, proximity card, wall mounted
JOBE-021	BENCH: 550D, laminate
JOCU-101	CUPBOARD: wall mounted, single door
JOCU-125	CUPBOARD: wall mounted, double door, for audio-visual equipment
JOCU-201	CUPBOARD: under bench, single door
JOCU-225	CUPBOARD: under bench, double door, for audio-visual equipment
JOGE-001	BULKHEAD: joinery
WIFX-056.04	WINDOW: fixed, internal, double glazed, sill at 750H, with integral blind
WLF1-002	WALL FINISH: paint, clinical areas


REQUIREMENTS FOR THE SELECTION OF SUITABLE FINISHES, HARDWARE, FIXTURES AND FITTINGS OF THE TYPE MANUFACTURED AND MARKETED AS TAMPER PROOF AND ANTI-LIGATURE, INCLUDING ANY WEIGHT LIMITS FOR COLLAPSING/BREAKING STRAIN FOR FIXTURES, MUST BE CONFIRMED AT PROJECT LEVEL BASED ON LOCAL PATIENT SAFETY POLICIES, LOCAL DESIGN GUIDANCE, RISK ASSESSMENTS AND CONFIRMATION OF OPERATIONAL MODELS. ALL TAMPER PROOF AND ANTI-LIGATURE ITEMS MUST BE INSTALLED IN ACCORDANCE WITH THEIR MANUFACTURERS INSTRUCTIONS.

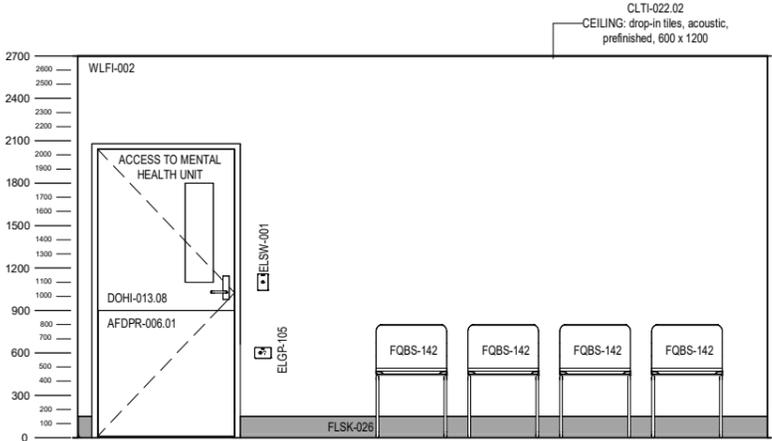


ELEVATION 1

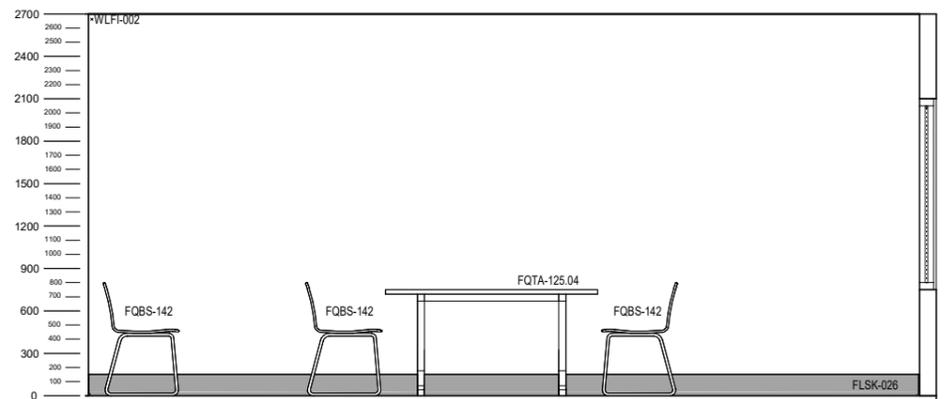

ELEVATION 2

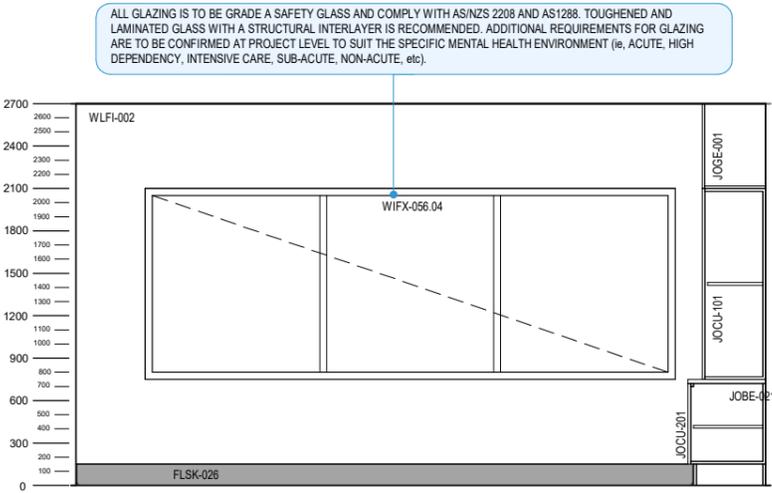

ELEVATION 3

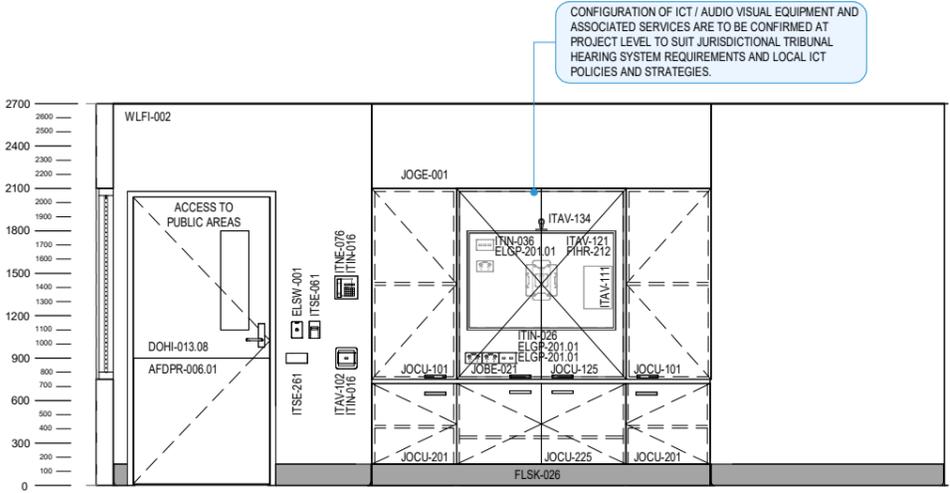

ELEVATION 4