

Australasian Health Facility Guidelines

Part B - Health Facility Briefing and Planning 360 - INTENSIVE CARE - GENERAL





© 2013 Australasian Health Infrastructure Alliance

The Australasian Health Facility Guidelines (AusHFGs) and the information in them are the copyright of the Australasian Health Infrastructure Alliance (AHIA). The information in the AusHFGs is made freely available.

Australasian Health Facility Guidelines

Address: PO Box 1060, North Sydney NSW 2059

Website: http://www.healthfacilityguidelines.com.au
Email: webmaster@healthfacilityguidelines.com.au

The AusHFGs are an initiative of the Australasian Health Infrastructure Alliance (AHIA). AHIA membership is comprised of representatives from government health infrastructure planning and delivery entities in all jurisdictions in Australia and New Zealand.

Disclaimer

AHIA gives no warranty or guarantee that the information in the AusHFGs is correct, complete or otherwise suitable for use. AHIA shall not be liable for any loss howsoever caused whether due to negligence or otherwise arising from the use of or reliance on this information.

AHIA recommends that those seeking to rely on the information in the AusHFGs obtain their own independent expert advice.

Australasian Health Facility Guidelines

INDEX

| INTRODUCTION | 4 |
|--------------------------------|----|
| Preamble | 4 |
| Introduction | 4 |
| Policy Framework | 5 |
| Description of the Unit | 5 |
| PLANNING | 7 |
| Operational Models | 7 |
| Operational Policies | 8 |
| Planning Models | 9 |
| Functional Areas | 11 |
| Functional Relationships | 11 |
| DESIGN | 13 |
| Access | 13 |
| Parking | 13 |
| Disaster Management | 13 |
| Infection Control | 13 |
| Environmental Considerations | 14 |
| Space Standards and Components | 15 |
| Safety and Security | 17 |
| Finishes | 18 |
| Fittings and Fixtures | 18 |
| Building Service Requirements | 19 |
| COMPONENTS OF THE UNIT | 22 |
| Standard Components | 22 |
| Non-Standard Components | 22 |
| APPENDICES | 23 |
| Schedule of Accommodation | 23 |
| Functional Relationships | 26 |
| Levels of Care | 26 |
| Checklists | 28 |
| Further Reading | 28 |
| References | 29 |

INTRODUCTION

Preamble

360.001.000

PURPOSE OF GUIDELINE

960403

This Health Planning Unit (HPU) has been developed for use by the design team, project managers and end users to facilitate the process of planning and design.

360.001.010

960404

The Intensive Care Unit HPU was originally developed for NSW Health and issued for Australasian use in 2006. This revision has been informed by an extensive consultation process that was completed in 2013.

Introduction

360.002.000

GENERAL

960405

This HPU outlines the specific requirements for the planning and design of an Intensive Care Unit (ICU), including a Paediatric Intensive Care Unit (PICU).

360.002.010

960406

This document should be read in conjunction with AusHFG generic requirements described in:

- Part A Introduction and Instructions for Use;
- Part B Section 80 General Requirement and Section 90 Standard Components, Room Data and Room Layout Sheets;
- Part C Design for Access, Mobility, OHS and Security;
- Part D Infection Prevention and Control; and
- Part E Building Services and Environmental Design.

360.002.020

960407

The College of Intensive Care Medicine (CICM) of Australia and New Zealand has published Minimum Standards for Intensive Care Units (revised 2011). These standards are extensively referenced in this HPU. Refer to College of Intensive Care Medicine of Australia and New Zealand (CICM), 2011, <u>CICM - Minimum Standards for Intensive Care Units IC-1</u> (2011).

360.002.025

501348

Intensive Care Units provide critical care to patients with life threatening illness or injury. These Units provide a concentration of clinical expertise, technological and therapeutic resources which are coordinated to care for the critically ill patient.

The clinical infrastructure and staff profiles reflect the complex nature of the monitoring and therapeutic interventions undertaken to provide the necessary physiological and psychosocial support required.

Demand for intensive care services continues to increase and the capacity for 'growth' and 'future expansion' of a service should be considered when planning and designing a new or expanded Unit.

360.002.028

960409

ICUs are part of a broader range of critical care services which include Coronary Care Units (CCU), Neonatal Intensive Care Units (NICU) and High Dependency Units (HDU). With the exception of HDUs, these other services are not described in this document as they are detailed within other HPUs. Refer to:

- AHIA, 2012, AusHFG Part B: HPU 260 Coronary Care Unit; and
- AHIA, 2014, AusHFG Part B: HPU 390 Intensive Care Neonatal/ Special Care Nursery.

Australasian Health Facility Guidelines

360.002.033

960412

The nature and extent of intensive care services may vary greatly from hospital to hospital, and will also rely upon the operational policies for an individual facility. Increasingly, ICUs have extended roles including rapid response teams, outreach/liaison, retrieval services, and central venous catheter and TPN services. These extended roles, where they exist, need to be considered during planning.

360.002.038

300743

Smaller hospitals may provide higher levels of critical care in the form of high dependency beds, within or attached to general inpatient units.

360.002.048

960411

Where paediatric intensive care services are collocated within an adult ICU, these beds are ideally separated within the Unit. The provision of PICU as part of a children's hospital will generally be provided as a stand-alone unit.

Policy Framework

360.003.000

SPECIFIC POLICIES/GUIDELINES

501350

Project teams will also need to consider local jurisdictional policies as these requirements may vary or differ from the information contained in this HPU. The *Further Reading* section of this HPU provides some guidance towards this jurisdiction-specific policy information.

The following publications are also relevant:

- College of Intensive Care Medicine of Australia and New Zealand (CICM), 2011, <u>CICM</u> <u>Minimum Standards for Intensive Care Units IC-1 (2011)</u>; and
- College of Intensive Care Medicine of Australia and New Zealand (CICM), 2010, <u>Recommendations on Standards for High Dependency Units for Training in Intensive</u> Care Medicine IC-13.

Description of the Unit

360.004.000

DESCRIPTION OF ICU HEALTH PLANNING UNIT (HPU)

960413

Intensive Care Unit

An ICU is a specially staffed and equipped, separate and self-contained area within a hospital for the management of patients with life-threatening or potentially life-threatening, and reversible or potentially reversible organ failure. The ICU provides resources for the support of patients and their families, and utilises the specialised skills of medical, nursing and other staff experienced in the management of critically ill patients.

These skills and resources, necessary to care for the critically ill, are most efficiently concentrated in one area of the hospital.

High Dependency Unit

An HDU is a specially staffed and equipped unit or area of an ICU that provides a level of intermediate care between intensive care and general inpatient care. In practice, beds are usually integrated within an ICU rather than provided as a separate unit so that specialty skills are maintained and patient transfers are reduced.

Paediatric Intensive Care Unit

A PICU is a separate and self-contained service provided by selected tertiary referral centres that may be collocated with an adult ICU and capable of providing comprehensive critical care including complex multi-system life support for an indefinite period to children less than 16 years of age. Refer to College of Intensive Care Medicine of Australia and New Zealand (CICM), 2011, CICM - Minimum Standards for Intensive Care Units IC-1

(2011).

360.004.010

LEVELS OF SERVICE/ROLE DELINEATION

501349

Descriptions of role delineation and levels of service for ICUs vary among jurisdictions. This HPU references CICM levels.

The level of intensive care services available should support the delineated role of the health service. The role of the ICU will vary, depending on staffing expertise, facilities and support services as well as the severity of illness and activity data of patients being admitted. The level of service is determined by the type and immediacy of clinical presence and hospital resources together with teaching and research activities; not the standard of care.

The three levels of ICU, along with additional information relating to PICU and HDU, are described in the Appendices.

360.004.020

PATIENT CHARACTERISTICS

960414

General patient characteristics are outlined in the descriptions of service levels. Specific characteristics will vary between individual facilities but may include ventilated and non-ventilated patients; multiple invasive technologies; major surgery such as cardiac, vascular, thoracic, neurology, trauma; organ failure; drug overdose; organ transplantation and other emergency conditions.

Super specialty services may be provided for specialties such as acute spinal injuries, severe burns and cardiac transplantation.

Bariatric patients requiring intensive care intervention constitute another group requiring special consideration when admitted to an ICU.

PLANNING

Operational Models

360.005.000

HOURS OF OPERATION

960415

Intensive Care Units provide a 24 hour, seven day per week service.

360.005.010

OPERATIONAL SERVICE MODELS

501351

Optimal facility outcomes are dependent on a clear definition of the operational model that will be used in the future ICU. This model will identify innovations and trends that will need to be accommodated within a new facility.

Four broad approaches to ICU planning are described in this HPU. The model chosen will result from a detailed analysis of unit size and issues of quality, safety and sustainability.

360.005.020

Combined Critical Care

501352

The combined critical care model collocates intensive care, high dependency and coronary care beds in a single unit.

This type of unit is usually located in a rural or regional hospital where flexibility of bed utilisation is important.

The acuity of patients managed in this type of unit is generally lower and is reflected in nurse to patient ratios.

360.005.030

Combined General Intensive Care

501353

Larger hospitals and some tertiary hospitals may combine all patients within a dedicated ICU that will cater for patients with a range of conditions including trauma, neurosurgery, thoracic or cardiothoracic surgery and general medical.

This model offers the advantage that in hospitals where the sub-specialty case load is limited staff are exposed to a general range of intensive care problems. Cross fertilisation of education and protocols allows efficient service provision when caseloads within subspecialty units are low.

360.005.040

Collocated Sub-Specialty Intensive Care

501354

This model collocates sub-specialty ICUs under a single operational and management structure. The sub-specialties usually encompass cardiothoracic, trauma, neurosurgical and general intensive care. High dependency care may be integrated into each subspecialty area or provided as a separate pod within the Unit.

This model has the principal advantage of collocating services and avoiding duplication. The single management structure allows for a more efficient medical and nursing cover. This model assumes Unit-wide policies and procedures with support services. Most equipment would be standardised.

360.005.050

Separate Intensive Care Units

501355

This model encompasses a range of differentiated ICUs within a hospital such as a separate general ICU, a separate HDU, a separate Cardiothoracic ICU and a separate Neurosurgical ICU etc.

The model encourages the development of sub-specialty medical and nursing skills but can result in duplication of management structures, policies and procedures. Physical isolation can, at times, make it difficult to adequately resource and relieve staff in the Unit.

360.005.060

GENERAL COMMENTS ON MODELS

501356

Despite the model selected, consideration should be given to future proofing to enable expansion of ICU beds if required. Collocation of a HDU with beds equipped to the same standard as an ICU is one means of achieving this. The service may be an expansion within the ICU or be a unit that can be separated and integrated relevant to activity requirements. By identically equipping HDU beds the future expansion demands of intensive care services can be easily met.

Operational Policies

360.006.000

GENERAL

960416

The development of operational policies is integral to defining how the unit will operate within a healthcare facility or health service, as well as in relation to adjoining health services from where patients may be referred. They impact on the capital and recurrent costs of a facility and will vary from unit to unit depending on a wide range of factors such as the clinical characteristics of the patients and the defined role of the unit. The cost implications of proposed policies should be fully evaluated to ensure the most cost-effective and efficient design solutions are developed in providing therapeutic and high quality physical environments.

Operational policies should be developed for every service as part of the project planning process. For further information refer to AHIA, 2010, <u>AusHFG Part B: Section 80 General Requirements</u>.

360.006.010

ADMISSIONS AND DISCHARGE

960417

Admissions policies will be determined by the level of service and the availability of support services.

Each Unit should have defined policies/guidelines for admission, discharge and referral of patients. Refer to College of Intensive Care Medicine of Australia and New Zealand (CICM), 2011, CICM - Minimum Standards for Intensive Care Units IC-1 (2011).

360.006.020

PATIENT CLINICAL MANAGEMENT

960418

Policies and procedures should be developed to clarify the range of patient management regimes, treatments and procedures performed in the Unit. These will include the management of infectious and dying patients.

360.006.030

VISITOR AMENITIES AND ACCESS

960419

A range of visitor amenities will be provided to support the needs of families and friends including:

- access to interview rooms;
- waiting areas that provide ready access to visitor toilets; and
- access to health information.

In larger Units, general waiting space will be separated from family space.

Patient bed spaces are sized to accommodate visiting family and friends.

Operational procedures and guidelines need to be developed regarding visiting hours, onsite accommodation and access protocols to the Unit.

360.006.040

CLINICAL INFORMATION SYSTEMS

960420

Unit design and operational policies should allow for the introduction of clinical

information systems including electronic health records that integrate patient monitoring outputs and medical imaging technology (PACS). The system should have automated audit, data collection and reporting capacity such as ANZICS data base submissions.

Consideration needs to be given as to the method and location of entering and retrieving patient information. This may occur at the bedside, decentralised workstations, mobile units or at staff work stations.

360.006.050

STAFFING

960421

Identify the staff establishment early in the planning process. This will enable the assessment of the work space and amenities required to support staff to deliver services safely and efficiently. These staff may include:

- medical staff such as staff specialists, VMO's, advanced trainees and junior medical staff;
- nurses such as nursing managers, registered nurses, educators and clinical nurse specialists and consultants;
- equipment manager;
- clinical information system manager;
- allied health staff including, physiotherapist, social workers, and pharmacists;
- administrative staff;
- project officers (e.g. organ and tissue donation coordinators);
- rapid response /liaison team members, and other ICU based services (e.g. central venous access service);
- wards persons/porters;
- research and data management staff;
- environmental services staff; and
- chaplain/ pastoral care providers.

Staff may include the following working as a multidisciplinary team, in either a permanent or visiting capacity. Access to work space in clinical and non-clinical areas is essential.

360.006.060

RAPID RESPONSE TEAMS (RRTs)

960422

An emerging trend is for RRTs that serve the whole hospital, to be located and managed by the ICU. This service may require additional staff, work space and facilities for equipment storage.

360.006.070

EDUCATION, TRAINING AND RESEARCH

960423

Requirements for education, training (including access to advanced clinical simulation) and research will depend on the overall policies of the health service, the level of service and the need to obtain professional accreditation.

Planning Models

360.007.000

GENERAL PRINCIPLES

501358

The operational model chosen for the HPU will greatly influence the planning model adopted.

360.007.010

UNIT SIZE

960424

There is no international consistency regarding the recommended size of an ICU. An optimal unit size is considered to be between 10 to 16 beds which allows for suitable

staffing and a sufficient casemix to develop expertise, experience and training. These beds will include isolation capacity.

Larger units will likely require two or more clusters of beds. Each pod will require access to a range of support spaces that minimises staff travel, supports infection prevention and reduces the potential for cross-infection.

360.007.020

ACUITY ADAPTABLE BED SPACES

960425

An alternative to providing differing bay/ room sizes for intensive and high dependency care is to standardise the space allocation so that it is capable of being used to provide a range of care.

The provision of single rooms provides increasing flexibility to accommodate a range of patients such as the provision of paediatric intensive care beds in an adult ICU rather than a stand-alone pod should bed requirements be low. The literature indicates that single rooms can reduce patient stress and the need for multiple patient transfers. Provision of single rooms will also reduce the risk of infection. As the mortality rate arising from infections within the ICU is much higher than other clinical environments, the use of single rooms is ideal (The Prevalence of Nosocomial Infection in Intensive Care Units in Europe: Results of EPIC Study).

The bed space will be planned to provide clear zone for the patient, staff and visitors. This will ensure that staff can deliver care unimpeded while providing a good level of amenity for family and friends.

For further reading see Vincent JL, Bihari DJ, Suter PM, Bruining HA, White J, Nicolas-Chanoin MH, Wolff M, Spencer RC, Hemmer M., 1995, The Prevalence of Nosocomial Infection in Intensive Care Units in Europe. Results of the European Prevalence of Infection in Intensive Care (EPIC) Study..

360.007.030

PATIENT BED SPACES

960426

Patients may be accommodated in open bed bays with walls and a curtain or enclosed single bed rooms. Adequate area is required for equipment and for unobstructed work area to provide the required clinical care and management. Consideration needs to be made of changing therapeutic and diagnostic practice.

Units expected to provide prolonged ventilation may consider equipping an outdoor space, for example a balcony or courtyard, with piped gases, suction and power points to support a ventilated patient.

360.007.040

PATIENT VISIBILITY

960427

Direct line of sight will be achieved from the staff station (a main or sub-station) to each critical care bay/ room. The upper one third of the patient's bed will be visible. Indirect means such as video monitoring may be used as a supplement. This permits the monitoring of patient status under both routine and emergency circumstances.

Non cavity sliding glass doors and partitions facilitate observation and increase access to the room in emergency situations.

Functional Areas

360.008.000

FUNCTIONAL ZONES

960428

Functional zones may include:

- Entrance / Reception Area;
- Patient Areas;
- Staff Areas; and
- Clinical and Non-Clinical Support Areas.

360.008.010

ENTRANCE/ RECEPTION

960429

This area provides the public entry point to the Unit. The area will provide support facilities for families such as beverage areas, waiting and interview rooms.

The inclusion of a video intercom at the front door linked to the main staff station within the ICU with remote door release should assist with ensuring safe entry and exit to the unit by visitors, particularly after hours when administration staff may not be available.

360.008.020

PATIENT CARE AREA

501360

Patient care areas form the core area of the Unit with all other zones radiating and supporting this clinical space.

The staff station will provide space for charting and central cardiac monitoring, resuscitation equipment, mobile equipment and PACS viewing facilities.

Where a pneumatic tube system is proposed, to deliver pathology and/or pharmaceuticals, early planning will ensure it is located within the staff station area.

360.008.030

960430

Each cluster of beds will have access to the minimum support facilities including staff station and a patient bathroom and/or ensuites. Support facilities may be shared between clusters of beds (e.g. pathology bay, disposal rooms etc.).

360.008.040

STAFF AREAS

960431

The staff areas will be located within close proximity to the patient care areas, while still providing staff with privacy from patient and public areas. Office space, staff amenities, meeting and reception facilities should be provided in line with staffing and jurisdiction office space guidelines.

360.008.050

SUPPORT AREAS - CLINICAL AND NON-CLINICAL

960432

The ICU should provide adequate storage space for the equipment and services required to support patients with increased acuity, complex conditions and the increasing clinical diagnostic and therapeutic interventions that occur simultaneously at the point of care.

This area includes clean and dirty utilities, linen bays, medical imaging viewing areas, point of care pathology, equipment storage areas including rooms and bays. The clean utility and some mobile equipment bays may be located within the patient care areas for easy access.

Functional Relationships

360.009.000

EXTERNAL

920166

The ICU should be a separate Unit within the hospital with close access to the Emergency Unit, Operating Unit, Medical Imaging Unit and helipad. Discrete transport routes to and from the Operating Unit would be required if the ICU provides recovery facilities for

Australasian Health Facility Guidelines

complex surgery e.g. cardiac, neurosurgery etc.

Ready access 24 hours per day is also required between the ICU and other inpatient units as well as ancillary services including pathology, pharmacy and allied health.

360.009.010

INTERNAL

920170

Planning of the ICU is complex and requires the correct relationships to be achieved between the functional zones described previously.

DESIGN

Access

360.010.000

EXTERNAL

960433

Rapid and urgent access is required from Emergency Unit and the Operating Unit to the ICU.

360.010.010

INTERNAL

960434

The following movement of patient, staff, visitors into and out of the Unit should be considered including:

- the ICU is a discrete stand-alone unit that will not be used as a through-traffic area;
- circulation routes for the transfer of critically ill patients in and out of the Unit should be separate from public circulation routes for visitors; and
- alternate travel routes will ideally be provided for patient transfers, staff and the movement of goods and waste.

Parking

960435

360.011.000

There are no specific parking requirements for ICUs.

Parking arrangements for on-call staff need to be considered to ensure that delays do not occur.

For additional information relating to staff parking, refer to AHIA, 2010, <u>AusHFG Part C:</u> <u>Section 790, Safety and Security Precautions</u>.

Disaster Management

360.012.000

501361

The planning team will consider the role of the Unit in any local, regional or statewide disaster management plans.

Each Unit will have operational plans and policies in place detailing the response to a range of internal and external emergency situations.

For further information refer to

- AHIA, 2010, <u>AusHFG Part C: Design for Access, Mobility, OHS and Security, Space</u>
 <u>Standards and Dimensions</u>; and
- AHIA, 2010, AusHFG Part B: Section 80 General Requirements.

Infection Control

360.013.000

GENERAL

501597

The following aspects contribute to the effective infection prevention and control, and are relevant within the context of this service:

- hand hygiene facilities;
- provision for the isolation of infectious patients;
- separation of clean and dirty work flows;
- storage;
- waste management; and

surface finishes.

An infection control risk assessment should be undertaken prior to concept design planning.

Refer to individual jurisdiction policies and guidelines, and to AHIA, 2010, <u>AusHFG Part D:</u> <u>Infection Prevention and Control</u>.

360.013.010

ISOLATION ROOMS

960436

An ICU must be capable of the isolation of infectious or immunosuppressed patients. (CICM 2011). Planning teams should consider the need for negative and positive pressure rooms, as well as HEPA filtration to air handling systems.

Requirements for isolation rooms will need to be confirmed through a risk assessment process which will include consideration of the role delineation of the health service and patient profile.

Owing to high mortality rates experienced by ICU patients with infections, single bed rooms are preferred.

360.013.020

HAND HYGIENE

920178

Clinical hand washing facilities should be provided convenient to the staff station and patient bed areas. One clinical hand-washing bay should be provided at every patient bed space and in corridors.

Alcohol based hand rub dispensers should also be provided generally throughout the Unit to supplement hand basins. In particular, these should be located at the Unit entry.

360.013.030

OTHER CONSIDERATIONS

960437

Acuity adaptable patient care spaces reduces the need to relocate patients as their condition changes (e.g. from intensive to high dependency care). This reduces patient movement within the ICU which in turn reduces opportunities for cross infection.

Environmental Considerations

360.014.000

ACOUSTICS (PATIENT-OCCUPIED AREAS ONLY)

920173

Noise is a constant source of complaint from patients and may compromise patient comfort and recovery. In particular, noise at night may have a negative impact on the ability of patients to sleep.

Confidentiality of patient information should also be protected.

While the use of single bed rooms can significantly reduce the impact of noise, when the doors are closed, staff may not be able to hear the patients when outside the room. This may be overcome by the placement of speakers in the room that are linked to sub-staff stations.

Signals from patient call systems, alarms from monitoring equipment, and telephones should be modulated to a level that will alert staff members, yet be rendered less intrusive.

For further information refer to AHIA, 2010, <u>AusHFG Part C: Design for Access, Mobility,</u> OHS and Security, Space Standards and Dimensions.

360.014.010

NATURAL LIGHT

501598

Natural light contributes to a sense of wellbeing for all building occupants including patients, staff and other users. A limited number of research studies suggest a link

between greater levels of natural light and improved clinical outcomes.

For these reasons, the use of natural light should be maximised throughout the Unit.

In Units where long-term ventilation is provided, consideration may be given to providing some collocated outdoor space so that patients can send some time outdoors. This space would need to be supported by a medical services panel.

360.014.020

PRIVACY

960438

A major conflict in the design of inpatient accommodation often arises due to the need to ensure that patients and staff can see each other, while also ensuring patient privacy.

Bedrooms and other areas occupied by patients should be designed and configured to give staff the greatest ability to observe patients, particularly unstable or vulnerable patients.

360.014.030

BED SCREENS

300761

Each patient bed space should have provision for visual privacy from casual observation by other patients and visitors. Blinds or curtains should be provided to screen open bed space ends and windows in dividing partitions and bedrooms.

360.014.040

INTERIOR DECOR

920179

Some colours, particularly the bold primaries and green, should be avoided in areas where clinical observation occurs. Such colours may prevent the accurate assessment of skin tones e.g. yellow / jaundice, blue / cyanosis, red / flushing.

360.014.050

SIGNAGE AND WAYFINDING

960439

Consideration needs to be given to the system used in the numbering of patient rooms. The numbering system will facilitate way finding for visitors and staff.

Refer to:

- AHIA, 2010, AusHFG Part C: Section 750, Signage; and
- Department of Health, NSW, 2009, <u>Technical Series 2 Wayfinding for Health Facilities</u>.

Space Standards and Components

360.015.000

HUMAN ENGINEERING

960440

Human engineering covers those aspects of design that permit effective, appropriate, safe and dignified use by all people, including those with disabilities.

Refer to:

- AHIA, 2010, AusHFG Part C: Section 730, Human Engineering; and
- AHIA, 2010, AusHFG Part C: Section 790, Safety and Security Precautions.

360.015.010

ERGONOMICS

960441

Patients in ICUs are nursed in beds and require significant, if not total assistance with all activities of daily living. Some strategies that can be used including:

- electric beds so that staff minimise bending and poor posture. Newer beds can be reconfigured electronically to become patient chairs;
- ceiling mounted hoists; and
- provision of mobile equipment bays to accommodate lifting equipment where ceiling mounted hoists are not provided.

Equipment will also be required for the management of bariatric patients. Examples include beds, patient chairs and hoists. Refer to jurisdictional policies regarding issues relating to ceiling mounted hoists and weight allowances.

For more details refer to AHIA, 2010, AusHFG Part C: Section 730, Human Engineering.

360.015.020

ACCESS AND MOBILITY

960442

The design will comply with AS 1428 -2010 - Design for Access and Mobility (Standards Australia). This would apply to bathrooms, public toilets and ensuites designed for independent wheelchair users including staff. For detailed information refer to:

- AHIA, 2010, AusHFG Part C: Section 730, Human Engineering; and
- Standards Australia, 2010, AS 1428 (Set) 2010 Design for access and mobility Set (SAI Global).

360.015.030

BUILDING ELEMENTS

960443

Building elements include walls, floors, ceilings, doors, windows and corridors.

For further details refer to AHIA, 2010, <u>AusHFG Part C: Section 710, Space Standards and Dimensions</u>.

360.015.040

DOORS AND DOORWAYS

960444

Ensure doorways are sufficiently wide and high to permit the manoeuvring of beds, wheelchairs, trolleys and equipment without risk of damage or manual handling injury, particularly in rooms designed for bariatric patients.

All entry points, doors or openings, should be a minimum of 1200mm wide, unobstructed. Larger openings may be required for special equipment, as determined by the operational policy.

360.015.050

BED SPACING / CLEARANCES

960445

There must be adequate clear distance between the bed and any fixed obstruction including bed screens or wall to facilitate resuscitation procedures without restricting movement of staff, beds, and equipment,

Generally this requires a minimum cubicle or room width of 4000 mm clear. Beds should be arranged so that there is a minimum clearance of 1200mm to each side and 900mm to the head or foot. The current room layouts for the Patient Bay – Critical, both $20m^2$ and $25m^2$, exceed these minimum dimensions.

360.015.060

960446

When an open plan arrangement is provided, a circulation space or aisle of 2200mm minimum clear width should be provided beyond dedicated cubicle space.

360.015.070

202019

CORRIDORS

The size of the basic ICU bed is often enlarged by the addition of monitors, drips and several staff, making movements more difficult than in other areas of the hospital.

Adequate circulation space will be provided for the safe and efficient movement of these trolleys and beds which are large and carry valuable and sensitive equipment, and patients who are severely ill.

These Guidelines provide information on the required corridor widths etc. for health care facilities, see AHIA, 2010, <u>AusHFG Part C: Design for Access, Mobility, OHS and Security, Space Standards and Dimensions</u>.

360.015.080

WINDOWS

920171

The environment provided should minimise stress to patients and staff. Therefore, natural light and views should be available from the Unit.

Windows are an important aspect of sensory orientation, and as many rooms as possible should have windows to reinforce day / night orientation. If ultrasounds are routinely being performed in the Unit, the ability to blackout a space with curtaining will be needed.

Window treatments should be durable and easy to clean. If drapes or shades are not a viable option, consider the use of tinted glass, reflective glass, exterior overhangs or louvres to control the level of lighting.

Consideration should be given to the design of external windows so that patients might have views while in bed or in a chair. If windows cannot be provided in each room, an alternate option is to allow a remote view of an outside window.

If single rooms are provided, glazing between rooms can allow staff to oversight patients in the next room. These viewing panels will need to ensure that patient privacy can also be achieved.

Safety and Security

360.016.000

SAFETY

960447

The design and construction of the facility and selection of furniture, fittings and equipment should ensure that users are not exposed to avoidable risks of injury.

360.016.010

SECURITY

960448

Facility planners and designers should enhance security by incorporating the principles Crime Prevention Through Environmental Design (CEPTED) such as territorial reinforcement, passive surveillance, space management and access control into the design.

Access to an ICU should be controlled with the ability to lock-down the Unit if required. However, this should not unnecessarily prevent access by family members.

Staff only areas will be planned so they are not accessed by unauthorised individuals.

Rooms containing high-cost equipment, medications and clinical supplies will be locked or under the direct supervision of staff to prevent theft and/or tampering.

360.016.020

RISK / HAZARD MANAGEMENT

960449

The physical environment has a significant impact on the health and safety of end users. A risk management approach ensures risks are managed systematically utilising a process that supports the anticipation, identification and avoidance of risks that may have an impact on users and services.

Broad consultation with all stakeholders and other identified processes may be utilised to identify risks according to the availability of expertise to ensure security, health and safety risks are proactively managed. Individual jurisdictions should refer to their local legislation for further requirements for plant and buildings.

360.016.030

960450

Occupational health and safety legislation requires designers to identify, assess and control risks in order to provide an optimal ergonomic design and to do this in consultation with stakeholders.

By adopting a risk management approach, many safety and security related hazards can be eliminated or minimised at the planning stage before work even begins, reducing the

likelihood of adverse incidents occurring.

360.016.040

Refer to:

960451

- AHIA, 2010, AusHFG Part C: Section 790, Safety and Security Precautions; and
- Standards Australia, 2004, AS/NZS 4360:2004 Risk Management (SAI Global).

Finishes

360.017.000

GENERAL

960452

Finishes in this context refer to walls, floors, windows and ceilings.

Refer to AHIA, 2010, AusHFG Part C: Section 710, Space Standards and Dimensions.

360.017.010

WALL FINISHES

960453

Adequate wall protection should be provided to areas that will regularly be subjected to damage. Particular attention should be given to areas where bed or trolley movement occurs such as corridors, bed head walls, treatment areas, equipment and linen trolley bays.

360.017.020

FLOOR FINISHES

500231

Refer to local jurisdictional policies and to:

- AHIA, 2010, AusHFG Part C: Section 710, Space Standards and Dimensions; and
- Department of Health, NSW, 2009, <u>Technical Series TS7 Floor Coverings in Healthcare Buildings</u>.

360.017.030

CEILING FINISHES

960454

Ceiling finishes should be selected with regard to appearance, cleaning, infection prevention and control, acoustics and access to services.

For more information refer to AHIA, 2010, <u>AusHFG Part C: Section 710, Space Standards and Dimensions</u>.

Fittings and Fixtures

360.018.000

DEFINITIONS

960455

Room Data Sheets (RDS) and Room Layout Sheets (RLS) in the AusHFGs contain most standard rooms as described in this HPU.

Refer to the RDS and RLS for detailed information, and to:

- AHIA, 2010, AusHFG Part C: Section 710, Space Standards and Dimensions; and
- AHIA, 2010, AusHFG Part F: Section 680 Furniture Fittings and Equipment.

360.018.010 960456

EQUIPMENT

The type and quantity of equipment will vary with the type, size and function of the unit and should be appropriate to the workload of the Unit.

The *Minimum Standards for Intensive Care Units* (2010) specifies minimum equipment to be included in an ICU. This equipment is identified on Room Data Sheets.

Refer to College of Intensive Care Medicine of Australia and New Zealand (CICM), 2011, CICM - Minimum Standards for Intensive Care Units IC-1 (2011).

360.018.020

BEDSIDE MONITORING

920183

Each Unit should contain an approved patient monitoring system, with visual display for each patient at a central monitoring point, generally the staff station. In large Units, a central monitor will be provided in each pod. Monitors with high / low alarm and the capability to provide hard copies of displays are recommended.

In each patient bedspace, one monitor will be located at the head of the bed. Future capacity may be provided for an additional monitor at the foot of the bed. An integrated ICU Clinical Information System should be a component of the monitoring system and will require a PC in each bedspace. Should a staff work base be located outside of each room, or between two rooms, an additional PC is usually needed. In future, this system will aggregate clinical information and store information on the electronic health record.

Bedside monitoring equipment should be located in a position that makes it easy for staff to access and view the equipment, but does not interfere with their ability to see or access the patient.

As monitoring equipment may increase over time, future capacity in terms of space and electrical facilities should be planned.

Building Service Requirements

360.019.000

GENERAL

502030

Refer to AHIA, 2010, AusHFG Part E: Building Services and Environmental Design.

360.019.010

AIR HANDLING SYSTEMS

203008

Provision of natural ventilation to patient care areas is not usually suitable within an ICU as the management of airflows and the creation of a stable environment are essential to the control of the spread of infection and an air conditioning system should be provided.

Consideration should be given to the provision of HEPA filtration, especially to isolation rooms.

Refer to:

- AHIA, 2010, AusHFG Part D: Infection Prevention and Control; and
- Standards Australia, 2003, <u>AS HB 260-2003: Hospital acquired infections Engineering down the risk (SAI Global)</u>.

360.019.020

960457

It is essential that services such as emergency lighting, telephones, duress alarm systems, including the central computer and electronic locks are connected to the emergency power supply.

Body/cardiac protection should be incorporated in all patient areas in accordance with:

- AHIA, AusHFG Part E: Section 3, Electrical; and
- Standards Australia, 2011, <u>AS/NZS 3003:2011 Electrical installations Patient areas (SAI Global)</u>.

360.019.030

LIGHTING

960458

Appropriate lighting, both general and task, will be provided throughout the ICU. Procedure lights may also be required in single and procedure rooms.

Lighting levels in patient rooms should be variable and individually controlled.

360.019.040

INFORMATION TECHNOLOGY AND COMMUNICATIONS

920175

A range of information technology and communications issues, and the associated infrastructure requirements, will need to be assessed during planning and design to ensure long term flexibility including:

- wireless technology;
- radiofrequency identification (RFID) for access control, locks etc.;
- duress alarm systems;
- voice / data (telephone and computers);
- videoconferencing capacity / telemedicine;
- electronic health records;
- clinical point of care systems such as CIS;
- Picture Archiving Communication System (PACS);
- Patient Administration Systems (PAS);
- Radiology Information Systems (RIS);
- paging and personal telephones replacing most aspects of call systems;
- patient multimedia devices including bedside monitors that function as televisions, computer screens for internet access, etc.;
- bar coding for supplies and x-rays / records;
- server and communications rooms;
- e-learning and simulation; and
- e-medication management and e-storage systems such as automated dispensing systems.

360.019.050

TELEHEALTH

960459

Facilities for video conferencing and consultations are required for staff education, patient consultations with specialist clinicians and to enable clinicians in remote locations to discuss cases.

360.019.060

NURSE / STAFF CALL SYSTEM

500241

The emergency call system should alert to a central module situated adjacent to the staff station, as well as to the staff and meeting rooms.

Call systems should be designed and installed to comply with Standards Australia, 1998, AS 3811 - Hard wired Patient Alarm Systems.

360.019.070

COMMUNICATIONS

960460

All ICUs should have an intercommunication system that provides voice linkage between the staff station, patient care areas, staff overnight rooms, meeting rooms and the staff room.

Some types of communication, such as personnel tracking and non-emergency calls, may best be accomplished using visual displays, such as numeric or colour-coded lights, which eliminate unnecessary noise.

There should be a mechanism for emergency internal and external communications when normal systems fail.

360.019.080

DURESS ALARMS

500246

Duress alarms - mobile or fixed - should be provided in accordance with jurisdiction policies. In the ICU context, fixed duress is likely to be provided at reception, in interview

Australasian Health Facility Guidelines

rooms and staff stations.

For further information refer to AHIA, 2010, AusHFG Part C: Design for Access, Mobility, OHS and Security, Space Standards and Dimensions.

HYDRAULIC SERVICES 360.019.090

960461

Warm water systems will be required.

360.019.100 **DIALYSIS POINTS**

960462

Consideration should be given to installation of reverse osmosis water access for dialysis in the Unit. This will be dependent on the mode and frequency of renal replacement therapy used in the Unit.

MEDICAL GASES 360.019.110

960463

Each bed will require oxygen, suction and medical air in quantities specified in RDS.

Refer to Standard Components for patient bedrooms.

360.019.120 **CLOCKS**

920174

The accurate tracking of time within the ICU is critical. The utilisation of synchronised digital wall clocks will be visible in all clinical areas and waiting areas.

COMPONENTS OF THE UNIT

Standard Components

360.020.000

960465

Standard Components (SC) refer to rooms / spaces for which Room Data Sheets, Room Layout Sheets (drawings) and textual descriptions have been developed and are available on the AusHFG website. Their availability in is indicated by 'Yes' in the SC column of the Schedule of Accommodation.

Standard components are provided to assist with the development of a project. Their use is not mandatory and if used they can be edited to be project specific.

Refer to separately itemised Room Data and Room Layout Sheets, and for the related text to AHIA, 2010, <u>AusHFG Part B: Section 90, Standard Components</u>.

Non-Standard Components

360.021.000

Non-Standard Components are unit-specific and are described below.

960464

360.021.010

PATIENT BAY - CRITICAL - ISOLATION CLASS N

960466

Description and Function

Single bed room which may be used to isolate patients with known infectious conditions. The room will have an adjoining anteroom that will be used by staff. Patients will enter the enclosed room via the main doorway. An internal communication system (for example intercom) should be provided between rooms.

Location and Relationships

Isolation Rooms should be clustered and located away from the Unit entrance.

Refer to AHIA, 2010, AusHFG Part D: Infection Prevention and Control.

360.021.020

BAY - PATHOLOGY

960467

Description and Function

All ICUs should have access to 24 hour Pathology Unit. When this service cannot be provided by the Pathology Unit, a satellite laboratory within or immediately adjacent to the ICU should serve this function including arterial blood gas analysis.

Location and Relationships

Accessible from all areas of the Unit.

360.021.030

RESPIRATORY / BIOMEDICAL WORKROOM

960468

Description and Function

A respiratory / biomedical workroom is an area for the repair maintenance and calibration of both respiratory and Biomedical equipment, and as a work base for anaesthetic and biomedical technicians when visiting the Unit. This area will typically be occupied intermittently by one or two persons. Piped oxygen and air should be provided to this area.

Location and Relationships

A respiratory / biomedical workroom should be accessible from all areas of the Unit.

APPENDICES

Schedule of Accommodation

360.022.000

960469

The Schedule of Accommodation lists generic spaces for this HPU. Quantities and sizes of spaces will need to be determined in response to the service needs of each unit on a case by case basis. A Level III service may range in size from less than 20 beds to one exceeding 50 beds.

The space allocated to staff areas, clinical support and to non-clinical support space will need to reflect bed numbers, the arrangement of the beds and staffing profiles. In practice, an ICU with 50 beds may be organised in four clusters with most clinical support space provided on a per cluster basis to ensure that materials are close to hand and staff travel time is minimised. This is likely to increase the overall space allocation.

The levels reflect the CICM descriptions as outlined in clause 360.004.010.

SC = Standard Component (drawings and data sheets)

Yes = Standard Component available on the AusHFG website.

360.022.010 ENTRY / RECEPTION

960470

| Room / Space | SC | Qty x m² Level 1 | Qty x m² Level 2 | Qty x m ² Level 3 | Remarks |
|------------------------|-----|---------------------|---------------------|---------------------------------|---|
| Interview Room | Yes | 1 x 12 | | 1 x 12 | For interviews with relatives |
| Meeting Room | Yes | | 1 x 15 | 1 x 15 | For interviews with relatives. |
| Toilet - Public | Yes | 1 x 3 | 1 x 3 | 1 x 3 | |
| Waiting | Yes | 1 x 10 | 1 x 15 | 1 x 20 | Nominal area. To be calculated at 1.2m² per ablebodied person, 1.5m² per wheelchair occupant. |
| Discounted Circulation | | 25% | 25% | 25% | |

360.022.020 PATIENT AREAS

960471

| Room / Space | SC | Qty x m² Level 1 | Qty x m² Level 2 | Qty x m ² Level 3 | Remarks |
|--|-----|---------------------|---------------------|---------------------------------|--|
| Patient Bay - Critical | Yes | 24 | 24 | 24 | FPU; group of not more than 12, within easy observation of staff station. |
| Patient Bay - Critical High Dependency | Yes | 20 | 20 | 20 | FPU; group of not more than 12, within easy observation of staff station. |
| Patient Bay Critical Enclosed (Class S Isolation) | Yes | 25 | 25 | 25 | FPU; group of not more than 12, within easy observation of staff station. Class S Isolation. |
| Patient Bay Critical Enclosed (Class N Isolation) | | 25 | 25 | 25 | FPU; clustered, located away from Unit entrance. |
| Anteroom | Yes | 6 | 6 | 6 | 6 FPU - use for 1 Bed Rooms - Isolation Class N (neg pressure ventilation) |

Australasian Health Facility Guidelines

| Room / Space | SC | Qty x m² Level 1 | Qty x m² Level 2 | Qty x m ² Level 3 | Remarks |
|-----------------------------|-----|---------------------|---------------------|---------------------------------|---|
| Bathroom | Yes | 1 x 15 | 1 x 15 | 1 x 15 | Inclusion depends on operational policy of unit |
| Bay - Linen | Yes | 1 x 2 | 2 x 2 | 2 x 2 | |
| Bay - Resuscitation Trolley | Yes | 1 x 1.5 | 2 x 1.5 | 2 x 1.5 | |
| Bay - Beverage | Yes | 1 x 4 | 1 x 5 | 1 x 5 | |
| Ensuite - Super | Yes | 1 x 6 | 1 x 6 | 1 x 6 | FPU; sizes for 'full assistance' i.e. 2 staff plus medical equipment. |
| Discounted Circulation | | 40% | 40% | 40% | |

360.022.030

STAFF AREAS

960472

Examples are only for offices. Individual jurisdictions to reference relevant policy documents.

| Room / Space | SC | Qty x m² Level 1 | Qty x m ² Level 2 | Qty x m ² Level 3 | Remarks |
|--|-----|---------------------|---------------------------------|---------------------------------|--|
| Meeting Room | Yes | Shared | 1 x 20 | 1 x 20 | Education / resource / teleheath - may include library, 24 hour access required via perimeter of unit. |
| Meeting Room | Yes | 1 x 15 | 1 x 30 | 1 x 35 | Seminar / Training Room - alternative location for Library 24 hour access required; perimeter of unit. |
| Office – Staff Workroom | Yes | | 1 x 15 | 1 x 15 | Inclusion depends on operational policy of unit. Close to staff station |
| Office - Single Person, 9m ² | Yes | | 9 | 9 | Senior Nurse Manager, NUM, staff specialists |
| Office - Single Person, 12m ² | Yes | | 1 x 12 | 1 x 12 | Medical Director |
| Office - Workstation | | 4.4 | 4.4 | 4.4 | Registrars - workstation/s, open plan or enclosed. Number determined by staffing. |
| Office - Workstation | | 5.5 | 5.5 | 5.5 | CNC/Educator-workstation/s, open plan or in shared office. Number determined by staffing. |
| Office - Workstation | | | 5.5 | 5.5 | Research - workstation/s, open plan or in shared office. Number determined by staffing. |
| Office - Workstation | | 5.5 | 5.5 | 5.5 | Secretarial - workstation/s, open plan or in shared office. Number determined by staffing. |
| Office - Workstation | | 5.5 | 5.5 | 5.5 | General - workstation/s open plan or in shared office. Number determined by staffing. |
| Overnight Stay - Bedroom | Yes | | 1 x 10 | 1 x 10 | Registrar, needs access to |

| Room / Space | SC | Qty x m ² Level 1 | Qty x m ² Level 2 | Qty x m ² Level 3 | Remarks |
|------------------------------|-----|---------------------------------|---------------------------------|---------------------------------|--|
| | | | | | bathroom facilities e.g. Staff Change Rooms |
| Shower - Staff | Yes | Shared | 1 x 3 | 1 x 3 | |
| Staff Room | Yes | 1 x 15 | 1 x 30 | 1 x 35 | |
| Staff Station | Yes | 1 x 18 | 1 x 25 | 2 x 25 | |
| Change - Staff | Yes | 1 x 8 | 1 x 20 | 1 x 30 | Includes toilets, showers, lockers; size depends on the staffing per shift. (Female) |
| Change - Staff | Yes | 1 x 8 | 1 x 20 | 1 x 25 | Includes toilets, showers, lockers; size depends on staffing per shift. (Male) |
| Store- Files | Yes | | 1 x 10 | 1 x 10 | |
| Store - Photocopy/Stationery | Yes | 1 x 5 | 1 x 8 | 1 x 12 | |
| Discounted Circulation | | 25% | 25% | 25% | |

SUPPORT AREAS - CLINICAL AND NON CLINICAL 360.022.040


960477

| Room / Space | SC | Qty x m ² Level 1 | Qty x m ² Level 2 | Qty x m ² Level 3 | Remarks |
|--------------------------------------|-----|---------------------------------|---------------------------------|---------------------------------|--|
| Bay - Blanket Warming | Yes | | 1 x 1 | 1 x 1 | Inclusion depends on operational policy of unit. |
| Bay - Hand Washing Type A | Yes | 1 | 1 | 1 | FPU; refer to Part D for numbers and locations |
| Bay - Mobile Equipment | Yes | 2 x 4 | 3 x 4 | 3 x 4 | Locate in quiet low traffic areas. |
| Bay - Beverage | Yes | | 1 x 4 | 1 x 4 | |
| Bay - Pathology POCT | | | 1 x 3 | 1 x 5 | Inclusion depends on operational policy of unit |
| Bay - Pneumatic Tube | | 1 x 1 | 1 x 1 | 1 x 1 | |
| Cleaner's Room | Yes | 1 x 5 | 1 x 5 | 1 x 5 | |
| Clean Utility | Yes | 1 x 12 | 2 x 12 | 2 x 12 | |
| Dirty Utility | Yes | 1 x 10 | 1 x 10 | 1 x 10 | |
| Disposal Room | Yes | 1 x 8 | 1 x 8 | 2 x 8 | Inclusion depends on bed numbers and waste management guidelines. Preference for only 1 larger room. |
| Equipment Clean-up | Yes | 1 x 8 | 1 x 18 | 1 x 18 | |
| Respiratory / Biomedical Workroom | | | 1 x 20 | 1 x 20 | Inclusion depends on operational guidelines of unit. |
| Store - Drug | Yes | 1 x 10 | 1 x 10 | 1 x 10 | May be included with clean utility |
| Store - Equipment | Yes | 1 x 15 | 1 x 15 | 1 x 20 | General equipment |
| Store - Equipment | Yes | | | 1 x 20 | Inclusion depends on operational guidelines of unit. Required for storage of respiratory associated equipment and consumables. |

| Room / Space | SC | Qty x m² Level 1 | Qty x m² Level 2 | Qty x m² Level 3 | Remarks |
|------------------------|-----|---------------------|---------------------|---------------------|--|
| Store - Sterile Stock | Yes | 1 x 15 | 1 x 30 | 2 x 30 | |
| Workroom - Telehealth | | | 1 x 12 | 1 x 12 | Optional: Inclusion depends on operational guideline of unit. Can be used for viewing medical images and discussions, and for telehealth activities for liaison regarding transfers, virtual rounds etc. |
| Discounted Circulation | | 25% | 25% | 25% | |

Functional Relationships

360.023.000 The following diagram sets out the functional relationships between zones in an ICU. 960473

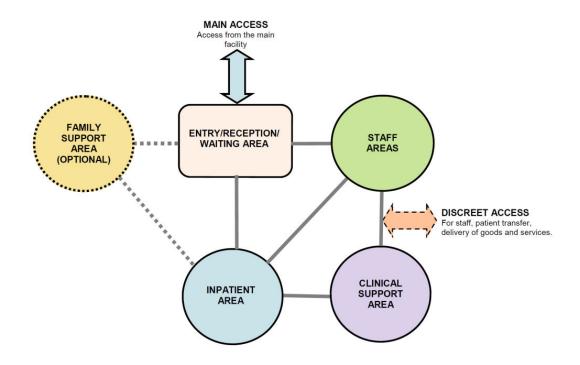

Levels of Care

360.024.000 LEVELS OF INTENSIVE CARE UNIT

960474

The follow information describes service levels for ICUs as described in the CICM Minimum Standards for Intensive Care Units.

360.024.010 LEVEL I ICU

960478

A Level I ICU should be capable of:

- providing immediate resuscitation and short term cardio-respiratory support for critically ill patients;
- monitoring and prevention of complications in "at risk" medical and surgical patients;

providing mechanical ventilation and simple invasive cardiovascular monitoring for a
period of at least several hours. Provision of such care for more than 24 hours is
permitted for patients with single system failure but only within the context of
ongoing discussion with a Level II or Level III unit with which the host unit has an
established referral relationship. Such a relationship should include telehealth
facilities for clinical consultation and advice, mutual transfer and back transfer policies
and an established, joint review process.

The patients most likely to benefit from Level I care for example include:

- patients with uncomplicated myocardial ischaemia;
- post-surgical patients requiring special observations and care;
- unstable medical patients requiring special observations and care beyond the scope of a conventional ward, and
- patients requiring short term mechanical ventilation.

The number of ICU beds and number of patients' admissions should be sufficient to maintain clinical skills by both medical and nursing staff.

360.024.020

LEVEL II ICU

960479

A Level II ICU should be capable of:

- providing a high standard of general intensive care, including complex multi-system life support, which supports the hospital's delineated responsibilities; and
- providing mechanical ventilation, renal replacement therapy and invasive cardiovascular monitoring for a period of at least several days. All patients admitted to the unit will be referred for management to the attending intensive care specialist.

At least six staffed and equipped beds should be provided to adequately discharge clinical and teaching functions. There should be sufficient clinical workload for maintaining clinical expertise and to provide adequate clinical exposure and education of intensive care staff and trainees. This should normally provide capacity for more than 200 mechanically ventilated patients per annum.

360.024.030

LEVEL III ICU

960480

A Level III ICU is a tertiary referral unit for intensive care patients and should be capable of providing comprehensive critical care including complex multi-system life support for an indefinite period. Level III units should have a demonstrated commitment to academic education and research. All patients admitted to the unit will be referred for management to the attending intensive care specialist.

At least eight staffed and equipped beds should be provided to adequately provide for clinical, teaching and research commitments consistent with the functioning of an ICU in a tertiary referral centre. There should be sufficient clinical workload and case-mix of patients to maintain a high level of clinical expertise and to provide adequate clinical exposure and education of staff and trainees. This should normally provide capacity for more than 400 mechanically ventilated patients per annum.

360.024.040

PAEDIATRIC INTENSIVE CARE UNIT (PICU)

960481

A PICU is a tertiary referral centre capable of providing mechanical ventilation, extracorporeal renal support services and invasive cardiovascular monitoring for an indefinite period. Extensive back up laboratory and clinical service facilities are required. These units should have a commitment to academic education and research. All patients admitted to the unit will be referred for management to the attending intensive care specialist. This equates to a Level III ICU in terms of planning.

A minimum of eight staffed and equipped beds is usually considered necessary to provide

for its clinical and teaching functions. There should be sufficient clinical workload to maintain clinical expertise. This is usually a minimum of 300 patient admissions per annum.

360.024.050

HIGH DEPENDENCY UNIT (HDU)

960482

Patients in HDU will typically have single organ failure and are at a high risk of developing complications. A HDU should have resources for immediate resuscitation and management of the critically ill. Equipment should be available to manage short term emergencies e.g. the need for mechanical ventilation. In stable patients routine monitoring and support may include ECG, oximetry, invasive measurement of blood pressure, low level inotropic or pressor support and non-invasive ventilation.

Checklists

360.025.000

Refer to the Planning Checklists at the ends of Parts A, B, C and D.

502225

Further Reading

360.026.000

960475

- Blomkvist, V, Eriksen, CA, Theorell, T, Ulrich, R, Rasmanis, G 2005, Acoustics and psychosocial environment in intensive coronary care, Occup Environ Med 2005, www.occenvmed.com;
- Cadenhead, CD, Anderson, DC 2009, Critical Care Units: Trends in winning design, World Health Design July 2009;
- Catrambone, C, Johnson, ME, Mion, L, Minnick, AF 2008, The Design of Adult acute Care Units in US Hospitals, Journal of Nursing Scholarship, 2009: 41:1.;
- CCMU and NSW Health, ICCMU Intensive Care Services Statewide Clinical Guidelines , http://intensivecare.hsnet.nsw.gov.au/five/staffonly/guidelines.php;
- College of Intensive Care Medicine of Australia and New Zealand, Recommendations on Standards for High Dependency Units for Training in Intensive Care Medicine, http://www.cicm.org.au/;
- Ferdinande, P, and members of the Task Force of the European Society of Intensive Care Medicine 1997, Recommendations on minimal requirements for Intensive Care Departments, Intensive Care Medicine 23.;
- Flaaten, H 2007, The intensive care unit, any place with four walls? Acta Anaesthesiologica Scandinavica 51.;
- Fridh, A, Forsberg, A, Bergbom, I 2007, Family presence and environmental factors at the time of a patient's death in an ICU, Acta Anaesthesiologica Scandinavica 51.;
- Hignett, S, Lu, J 2010, Space to care and treat safely in acute hospitals: Recommendations from 1866 to 2008, Applied Ergonomics.;
- Intensive Care Society (UK) 1997, Standards for Intensive Care Units, Intensive Care Society;
- Joseph, A, Rashid, M 2007, The architecture of safety: hospital design, Current Opinion in Critical Care 13.;
- Kutash, M, Northrop, L 2007, Family members' experiences of the intensive care unit waiting room, Journal of Advanced Nursing 60(4);
- National Intensive Care Working Group 2005, Intensive care unit, Health, Standard 01/03/2005, National Intensive Care Working Group;
- NSW Health Department, Guide to the role delineation of health services, 3rd Edition,
 2002;
- NSW Health 2010, NSW Critical Care Tertiary Referral Networks & Transfer of Care

- (Adults), NSW Health;
- NSW Health, Statewide and Rural Health Services and Capital Planning Branch, Isolation Capacity in Intensive Care Services, April 2012;
- NSW Government Action Plan for Health: Intensive Care Service Plan Adult Services, NSW Health, 2001;
- Rashid, M 2006, A decade of Adult Intensive Care Unit Design: A Study of the Physical Design Features of the Best-Practice Examples, Critical Care Nursing Quarterly Vol. 29, No.4.;
- Rosenberg, DI, Moss, MM and the American College of Critical Care Medicine of the Society of Critical Care Medicine 2004, Guidelines and levels of care for pediatric intensive care units, Critical Care Medicine, Vol. 32, No.10.;
- Rubert, R, Long, LD, Hutchinson, ML, Creating a Healing Environment in the ICU;
- Stark, A 2004, Innovation in the Design of the ICU, Minnesota Physician May 2004;
- The International Task Force on Safety in the Intensive Care Unit, 1993, International standards for safety in the intensive care unit, Intensive Care Medicine 19.;
- Ulrich, RS, et al 2008, A review of the Research Literature on Evidence-Based Healthcare Design, Georgia Institute of Technology and The Center for Health Design;
- Victorian Government Department of Human Services, Victoria's intensive care services: future directions, 2009; and
- WA Health 2009, WA Health Clinical Services Framework 2010 2020, WA Health.

References

360.027.000

960476

- AHIA, 2010, <u>AusHFG Part C: Design for Access, Mobility, OHS and Security, Space Standards and Dimensions</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance (AHIA), Sydney, NSW.
- AHIA, 2010, <u>AusHFG Part E: Building Services and Environmental Design</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance (AHIA), Sydney, NSW.
- AHIA, 2010, <u>AusHFG Part B: Section 90, Standard Components</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance (AHIA), Sydney, NSW.
- AHIA, 2010, <u>AusHFG Part B: Section 80 General Requirements</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance (AHIA), Sydney NSW.
- AHIA, 2010, <u>AusHFG Part D: Infection Prevention and Control</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance (AHIA), Sydney NSW.
- AHIA, 2010, <u>AusHFG Part C: Section 730, Human Engineering</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance (AHIA), Sydney, NSW.
- AHIA, 2010, <u>AusHFG Part C: Section 710, Space Standards and Dimensions</u>, Australasian Health Infrastructure Alliance (AHIA), Sydney, NSW.
- AHIA, 2010, <u>AusHFG Part C: Section 790</u>, <u>Safety and Security Precautions</u>, AHIA, AHIA, Sydney, NSW.
- AHIA, 2010, <u>AusHFG Part C: Section 750, Signage</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance (AHIA), Sydney, NSW.
- AHIA, 2010, <u>AusHFG Part F: Section 680 Furniture Fittings and Equipment</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance (AHIA), Sydney, NSW.
- AHIA, 2012, <u>AusHFG Part B: HPU 260 Coronary Care Unit</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance (AHIA), Sydney, NSW.
- AHIA, 2014, <u>AusHFG Part B: HPU 390 Intensive Care Neonatal/ Special Care Nursery</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance

- (AHIA), Sydney, NSW.
- AHIA, 0001, <u>AusHFG Part E: Section 3, Electrical</u>, Australasian Health Facility Guidelines, Australasian Health Infrastructure Alliance (AHIA), Sydney, NSW.
- College of Intensive Care Medicine of Australia and New Zealand (CICM), 2011, <u>CICM</u>-<u>Minimum Standards for Intensive Care Units IC-1 (2011)</u>, College of Intensive Care Medicine of Australia and New Zealand, Prahran, VIC.
- College of Intensive Care Medicine of Australia and New Zealand (CICM), 2010,
 Recommendations on Standards for High Dependency Units for Training in Intensive
 Care Medicine IC-13, CICM, Prahran VIC.
- Department of Health, NSW, 2009, <u>Technical Series 2 Wayfinding for Health Facilities</u>, Department of Health, NSW, North Sydney, NSW.
- Department of Health, NSW, 2009, <u>Technical Series TS7 Floor Coverings in</u> <u>Healthcare Buildings</u>, Department of Health, NSW, North Sydney, NSW.
- Standards Australia, 2010, AS 1428 (Set) 2010 Design for access and mobility Set (SAI Global), Standards Australia, Sydney, NSW.
- Standards Australia, 2003, <u>AS HB 260-2003: Hospital acquired infections Engineering down the risk (SAI Global)</u>, Standards Australia, Sydney, Australia.
- Standards Australia, 1998, <u>AS 3811 Hard wired Patient Alarm Systems</u>, Standards Australia, Sydney, Australia.
- Standards Australia, 2004, <u>AS/NZS 4360:2004 Risk Management (SAI Global)</u>, Standards Australia, Sydney, NSW.
- Standards Australia, 2011, <u>AS/NZS 3003:2011 Electrical installations Patient areas (SAI Global)</u>, Standards Australia, Sydney NSW.
- Vincent JL, Bihari DJ, Suter PM, Bruining HA, White J, Nicolas-Chanoin MH, Wolff M, Spencer RC, Hemmer M., 1995, <u>The Prevalence of Nosocomial Infection in Intensive</u>
 Care Units in Europe. Results of the European Prevalence of Infection in Intensive Care (EPIC) Study., Journal of the American Medical Association (JAMA), vol. 274, no. 8, pp. 639 644, American Medical Association, USA.